



-

- -


.

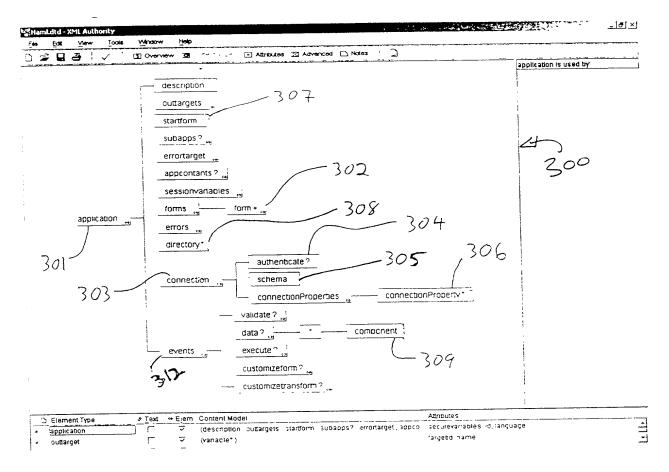

Figures

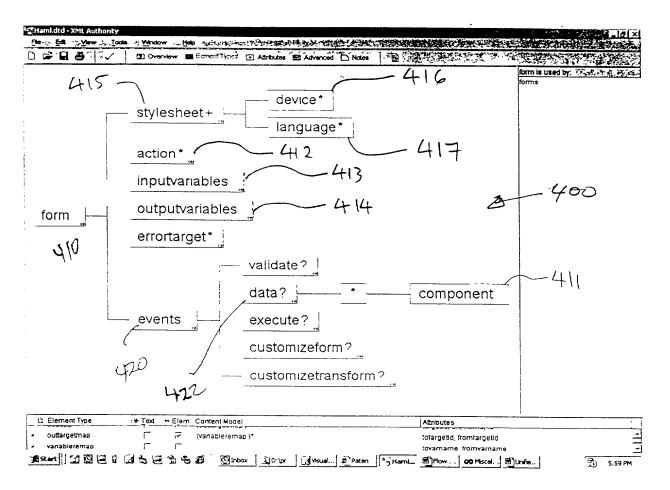

Lywe 4

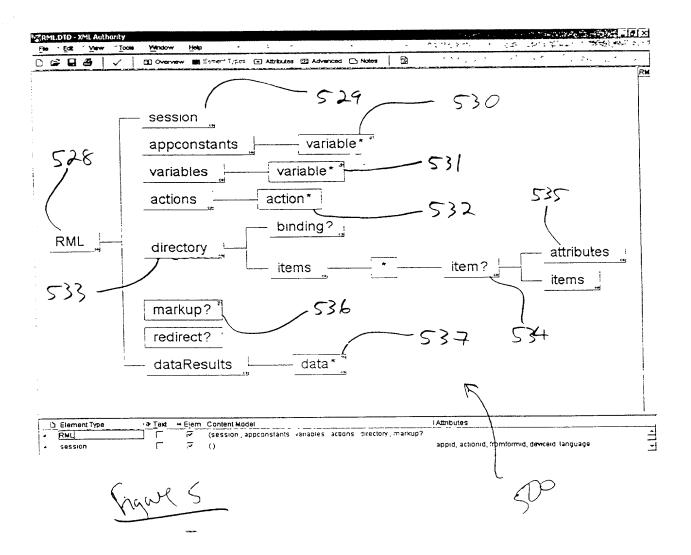



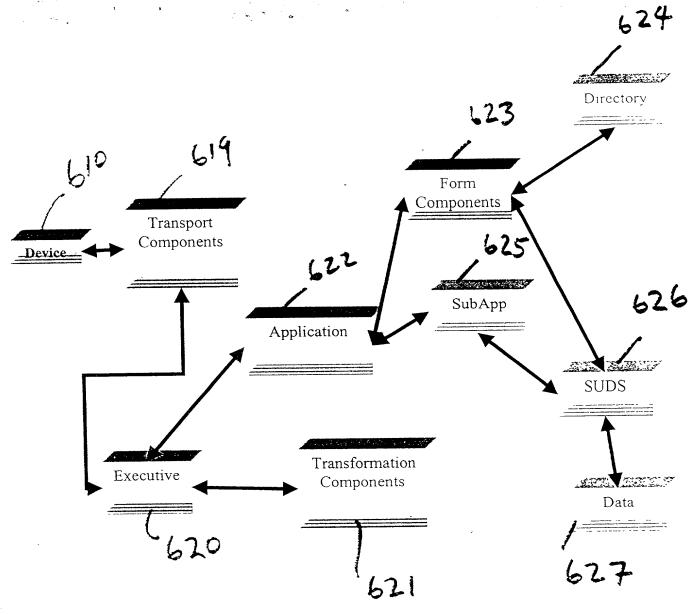


Fig 6

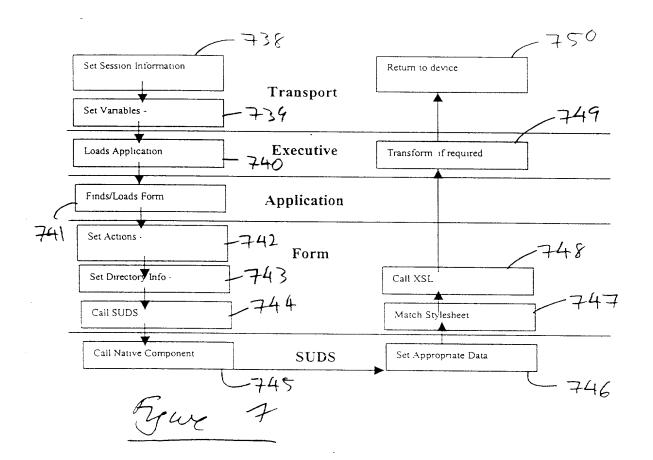

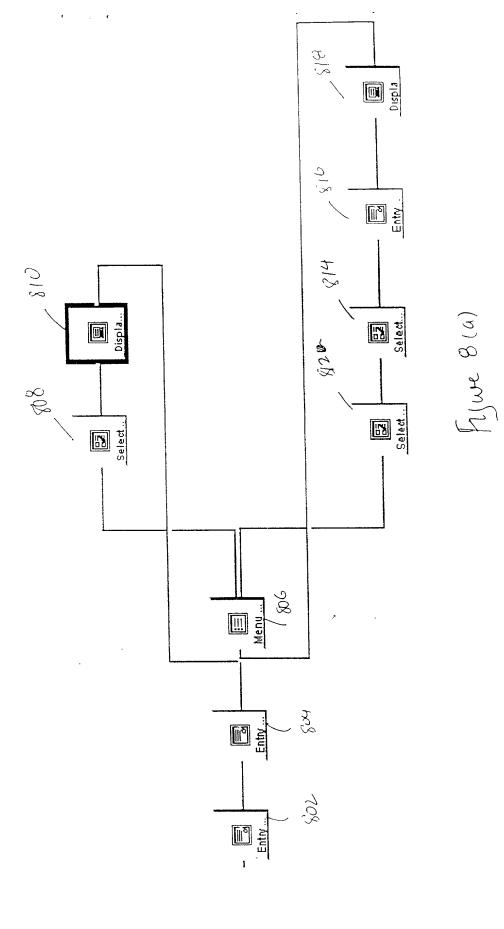

```
<?xml version="10" encoding="UTF-8" ?>
- <application usecookies="false" id="{F6681A6F-FB7C-4901-855C-08791DDE8DC8}"</pre>
   securevariables="false">
   <description version="1" name="MQBanking" />
   <outtargets />
   <startform totargetid="UserID" />
   <subapps />
   <errortarget totargetid="UserID" />
 - cproperties>
     <variable default="209.23.23.23" name="ServerIP" />
   </properties>
 - <sessionvariables>
     <variable name="Session" />
   </sessionvariables>
 - <forms>
   - <form targetid="UserID" includeheaders="false">
       <stylesheet contenttype="WML11" url="http://www.mobileq.com" />
       <action totargetid="Password" name="OK" />
       <inputvariables />
     - <outputvariables>
         <variable name="UserID" />
       </outputvariables>
       <events/>
     </form>
   - <form targetid="Password" includeheaders="false">
       <stylesheet contenttype="WML11" url="http://www.mobileq.com" />
       <action totargetid="Main" name="OK" />
     - <inputvariables>
         <variable name="UserID" />
       </inputvariables>
     - <outputvariables>
         <variable name="Session" />
       </outputvariables>
       <events/>
      </form>
    - <form targetid="Main" includeheaders="false">
       <stylesheet contenttype="WML11" url="http://www.mobileq.com" />
       <action totargetid="Account" name="Account Balance" />
       <action totargetid="Bill Payment" name="Bill Payment" />
       <action totargetid="Transfer" name="Account Transfer" />
       <inputvariables/>
       <outputvariables />
       <events/>
      </form>
    - <form targetid="Account" includeheaders="false">
        <stylesheet contenttype="WML11" url="http://www.mobileq.com" />
        <action totargetid="Details" name="OK" />
        <inputvariables />
      - <outputvariables>
         <variable name="AccountID" />
                                                 Fig 8(6)
        </outputvariables>
```

```
<events/> '
 </form>
- <form targetid="Details" includeheaders="false">
   <stylesheet contenttype="WML11" url="http://www.mobileq.com />
   <action totargetid="Main' name="OK" />
 - <inputvariables>
     <variable name="AccountID" />
   </inputvariables>
   <outputvariables />
   <events/>
  </form>
- <form targetid="Bill Payment" includeheaders="false">
   <stylesheet contenttype="WML11" url="http://www.mobileq.com" />
   <action totargetid="Bill" name="OK" />
   <inputvariables />
  - <outputvariables>
     <variable name="AccountID" />
    </outputvariables>
    <events/>
  </form>
- <form targetid="Bill" includeheaders="false">
    <stylesheet contenttype="WML11" url="http://www.mobileq.com" />
    <action totargetid="Amount" name="OK" />
  - <inputvariables>
      <variable name="AccountID" />
    </inputvariables>
  - <outputvariables>
      <variable name="BillID" />
      <variable name="AccountID" />
    </outputvariables>
    <events/>
   </form>
 - <form targetid="Amount" includeheaders="false">
    <stylesheet contenttype="WML11" url="http://www.mobileq.com"/>
     <action totargetid="Confirm" name="OK" />
   - <inputvariables>
      <variable name="BillID" />
       <variable name="AccountID" />
     </inputvariables>
   - <outputvariables>
       <variable name="AccountID" />
       <variable name="BillID" />
       <variable name="Amount" />
     </outputvariables>
     <events/>
   </form>
  - <form targetid="Confirm" includeheaders="false">
     <stylesheet contenttype="WML11" url="http://www.mobileq.com"/>
     <action totargetid="Main" name="Cancel" />
    - <inputvariables>
       <variable name="AccountID" />
       <variable name="BillID" />
                                                 79 8(c)
```

Fig 8(d)

. kraniz

```
. <dataresults>
 . <data name="source1">
   - <RECORDS>
     - <RECORD>
        <Blair PK="1">172-32-1176</Blair>
        <Test1 PK="1">1</Test1>
        <Test2 PK="1">2</Test2>
        <Test3 PK="1">3</Test3>
        <LastName>White</LastName>
        <FirstName>Johnson</FirstName>
       </RECORD>
     - <RECORD>
        <Blair PK="1">213-46-891</Blair>
        <Test1 PK="1">1</Test1>
        <Test2 PK="1">2</Test2>
        <Test3 PK="1">3</Test3>
        <LastName>Green</LastName>
         <FirstName>Marjorie</FirstName>
       </RECORD>
     - <RECORD>
         <Blair PK="1">238-95-7766</Blair>
         <Test1 PK="1">1</Test1>
         <Test2 PK="1">2</Test2>
         <Test3 PK="1">3</Test3>
         <LastName>Carson</LastName>
         <FirstName>Cheryl</FirstName>
        </RECORD>
      - <a>
        - <RECORD>
           <Blair PK="1">238-95-7766</Blair>
           <Test1 PK="1">1</Test1>
           <Test2 PK="1">2</Test2>
           <Test3 PK="1">3</Test3>
           <LastName>Carson</LastName>
           <FirstName>Cheryl</FirstName>
          </RECORD>
        </a>
       - <a>
        - <b>
          - <RECORD>
             <Blair PK="1">238-95-7766</Blair>
             <Test1 PK="1">1</Test1>
              <Test2 PK="1">2</Test2>
              <Test3 PK="1">3</Test3>
              <LastName>Carson</LastName>
              <FirstName>Cheryl</FirstName>
            </RECORD>
          </b>
         </a>
                                            Fig. 9 (a)
       </RECORDS>
```

```
</data> ' ' '
- <data name="source2">
 - <RECORDS>
   - <RECORD>
      <Blair PK="1">aaaaaa</Blair>
      <Test1 PK="1">1</Test1>
      <Test2 PK="1">2</Test2>
      <Test3 PK="1">3</Test3>
      <LastName>White</LastName>
      <FirstName>Johnson</FirstName>
     </RECORD>
   - <RECORD>
       <Blair PK="1">bbbbbbb</Blair>
       <Test1 PK="1">1</Test1>
       <Test2 PK="1">2</Test2>
       <Test3 PK="1">3</Test3>
       <LastName>Green</LastName>
       <FirstName>Marjorie</FirstName>
     </RECORD>
    - <RECORD>
       <Blair PK="1">ccccc</Blair>
       <Test1 PK="1">1</Test1>
       <Test2 PK="1">2</Test2>
       <Test3 PK="1">3</Test3>
       <LastName>Carson</LastName>
       <FirstName>Cheryl</FirstName>
      </RECORD>
    - <a>
      - <RECORD>
         <Blair PK="1">ddddddd</Blair>
         <Test1 PK="1">1</Test1>
         <Test2 PK="1">2</Test2>
         <Test3 PK="1">3</Test3>
         <LastName>Carson</LastName>
         <FirstName>Cheryl</FirstName>
        </RECORD>
      </a>
     - <a>
      - <b>
        - <RECORD>
           <Blair PK="1">eeeeeeee</Blair>
           <Test1 PK="1">1</Test1>
           <Test2 PK="1">2</Test2>
           <Test3 PK="1">3</Test3>
           <LastName>Carson</LastName>
           <FirstName>Cheryl</FirstName>
          </RECORD>
        </b>
       </a>
     </RECORDS>
   </data>
  </dataresults>
```

Fig. 9(b)

```
- <actions>
    <actions formatstring = "" actionid = "OK" querystring '?
    __SQRSIGN = A&_SQAPPID = {B77444A1-BD9E-4248-A664-6C483F8B4540}&_ACTIONID = OK&_SQFORMID = {8D7B4336-6341-4D2C-B2D8-49FE88D1B13A}&EmployeeID = $EmployeeID" /> </actions>
- <dictionary>
    <variable />
    <variable />
    </dictionary>
    </dictionary>
</rml>
```

• : : 3

```
- <xslistylesheet xmin= xsl= "http://www.w3.org/TR/WD-xsl >
 - <xsl:template match ="/">
   -<wml>
     - <head>
         <meta name="FormType" content="SQSelectForm" />
         <meta name="ListMethod" content="numeric"/>
       </head>
     - <card>
         <xsl attribute name="title">qwe</xsl attribute>
         - <select>
            <xsl:attribute name="title">qwe</xsl.attribute>
             <xsl:attribute name="name">asd</xsl:attribute>
           - <xsl:for-each select="/rml/dataresults/data
              [@name='source2']//RECORD">
             - <option>
               - <xsl:attribute name="value">
                  <xsl:value-of select="Blair" />
                  <xsl:value-of select="Test1" />
                  z1z
                  <xsl:value-of select="Test2" />
                  z1z
                   <xsi:value-of select="Test3" />
                 </xsl:attribute>
               - <xsl:attribute name="title">
                   <xsl:value-of select="LastName" />
                   <xsl:value-of select="FirstName'/>
                   <xsl:value-of select="/rml/data
                     [@name='source1']/RECORDS/RECORD/Blair"/>
                 </xsl:attribute>
                 blah blah blah
                </option>
              </xsl:for-each>
            </select>
          - <xsl:for-each select="/rml/actions//action">
          - <do>
              <xsl:attribute name="type">accept</xsl:attribute>
            - <xsl:attribute name="label">
                <xsl:value-of select="@actionid" />
              </xsl:attribute>
             - <qo>
               - <xsl:attribute name="href">
                  <xsl:value-of select="@querystring" />
                </xsl:attribute>
               </go>
             </do>
           </xsl:for-each>
                                                                  Fig 10(a)
         </card>
```

</wi></will>
</xsl:template>
</xsl:stylesheet>

Fig 10(b).

```
<wml>
 <head>
    <meta name="FormType" content = 'SQSelectForm' />
    <meta name="ListMethod" content="numeric" />
   </head>
-- < card title="Select Account">
   - 
     - <select title="Select Account" name="HoldingsAccountID">
        <option value="1" title="Acct 10314">Acct 10314
        <option value="2" title="Acct 11345">Acct 11345< option>
      </select>
      <br />
     - <do type="accept" label="OK">
      <go href="?_SQRSIGN=A&_SQAPPID={8D360BDF-E570-45E9-BEC1-</pre>
        4E5DD949C5C0}&_ACTIONID=OK&_SQFORMID={BCC091A1-63D4-
        11D3-9E34-0090273EFC3B}
        &HoldingsAccountID=$(HoldingsAccountID)
        &UserID=246531&Session=1"/>
     </do>
   </card>
  </wml>
```

و ۱۰۰

Fig- 11

ок

Figure 12

the state of the costs of them out most is a state of the state of the